


RA 2 - ADAPTADOR DE TORRE

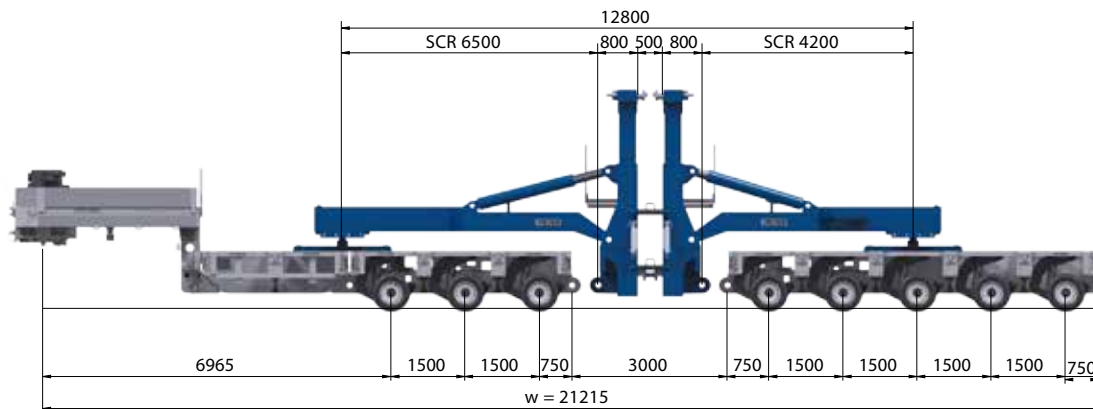

FEATURES:

- ✓ Payload: 2 x 50,000 kg
- ✓ Tower diameter, inner flange: 1,665–4,965 mm
- ✓ Tower diameter, outer flange: 2,070–5,280 mm
- ✓ Combinable with bogie modules (rigid coupling or free-turning)
- ✓ Combinable with dolly trailers (free-turning only)
- ✓ Control panel for the hydraulics
- ✓ Aluminum working platform with ladder

OPTIONS:

- Removable extension for tube diameters of up to 6,000 mm
- Free-turning units with steering actuation (for direct mounting on fifth-wheel coupling on tractor/dolly)
- Free-turning units without steering actuation (for combination with long-load turntable bolsters)

DEADWEIGHTS:

- RA 2 per adapter: approx. 5,750 kg
- FTD with SCR of 4,200 mm: approx. 3,500 kg
- FTD with SCR of 6,500 mm: approx. 4,800 kg

TECHNICAL DATA:

MAX. PAYLOAD PER ADAPTER PAIR (RIGID CONNECTION/CENTRAL CENTER OF GRAVITY)

- STHP 8 (3+5): approx. 100,000 kg
- STHP 10 (4+6): approx. 88,000 kg

TECHNICAL DATA:

MAX. PAYLOAD PER ADAPTER PAIR (IN COMBINATION WITH FREE-TURNING DEVICE/CENTRAL CENTER OF GRAVITY)

- SCR 4,200 mm: approx. 96,000 kg
- SCR 6,500 mm: approx. 67,000 kg